



Features:

- Universal / Full range AC input
- Built-in active PFC function
- 100% full load burn-in test
- 3 years warranty



Characteristics					
Part Number	PD-75-5	PD-75-12	PD-75-15	PD-75-24	PD-75-48
DC Output	5V	12V	15V	24V	48V
Rated Output Current	12A	6A	5A	3.2A	1.62A
Ripple & Noise	<80mV	<120mV	<150mV	<200mV	<200mV
Voltage ADJ. Range	4.3V-5.6V	10.6V-13.5V	12.7V-17V	22.1V-26.7V	33V-40V
Voltage Accuracy	+/-3%				
Line Regulation	+/-0.5%				
Load Regulation	+/-2%				
Set-up Time	<2.0S (115Vac input, Full load) <1.5S (230Vac input (Full load)				
Hold up Time	>20mS (115 input, Full load) >50mS (230Vac input, Full load)				
Temperature Coefficient	+/-0.03°C				
Overshoot and Undershoot	<5%				
Input Voltage Range	90Vac - 264Vac		127Vdc-370Vdc		
Input Frequency Range	47Hz-63Hz				
Efficiency (115Vac)	79%	84%	85%	87%	88%
Efficiency (230Vac)	80%	85%	86%	88%	89%
AC Current (max.)	<2.5A				
Inrush Current (max.)	20A@115Vac		40A@230Vac		Cold Start
Leakage Current	Input-output<0.25mA		Input-PG:<0.75mA		
Over Load Protection	105 - 150% of rated output current, constant power				
Over Voltage Protection	110 - 150% of rated output voltage constant voltage				
Short Circuit	Long term mode, auto recovery				
Operating Temp. & Humidity	-25 to 70°C 20 to 90%RH (No condensing)				
Storage Temp. & Humidity	-40 to 80°C 10 to 95%RH (No condensing)				
Safety Standards	UL60950-1, EN60950-1: 2006				
Withstand Voltage	Primary-Secondary: 3KVac <10mA Primary-PG:1.5KVac; <10mA Secondary-PG:0.5KVDC<10mA				
Isolation Resistance	>100M ohms				
EMI Conduction Radiation	Compliance to EN55022, EN55024 Class B				
Harmonic Current	Compliance to EN61000-3-2, 3				
EMS Immunity	Compliance to EN61000-4-2,3,4,5,6,8,11; ENV50204, EN61000-6-2 Heavy Industry Level, Criteria A				
MTBF	>200,000 Hours				
Dimension	129mm x 98mm x 38mm				
Packing	30PCS/CTN 14.2Kgs				
Cooling Method	Cooling by free air convection				

Stontronics Ltd




Chancerygate Business Centre, Cradock Road, Reading, Berkshire, RG2 0AH.

Tel: +44 (0) 118 931 1199 • Fax: +44 (0) 118 931 1145 • Email: info@stontronics.co.uk • Web: www.stontronics.com

Please Note: Image shown is representative of entire range. Individual PSU image &/or drawings or data sheets available on request.

Stontronics Ltd accepts no responsibility for typographical errors in the production of this leaflet. Product specifications are subject to change without notice.



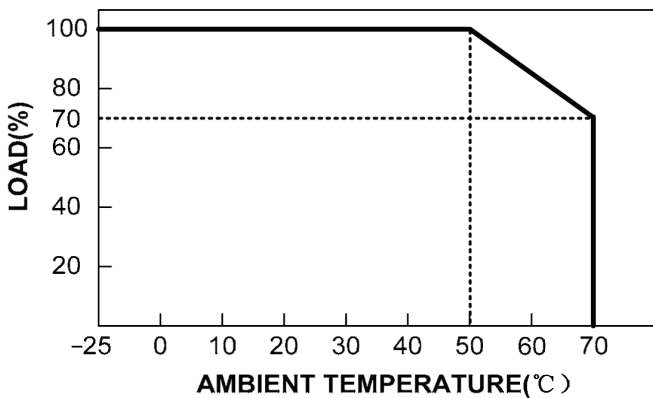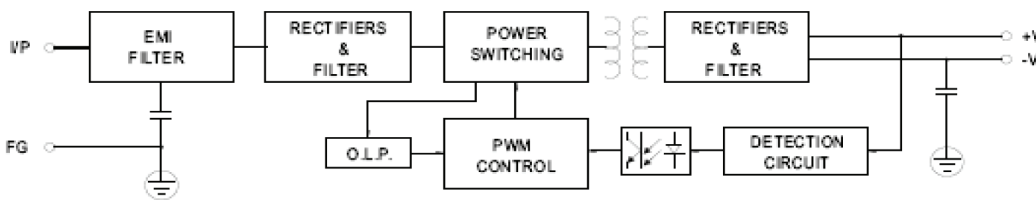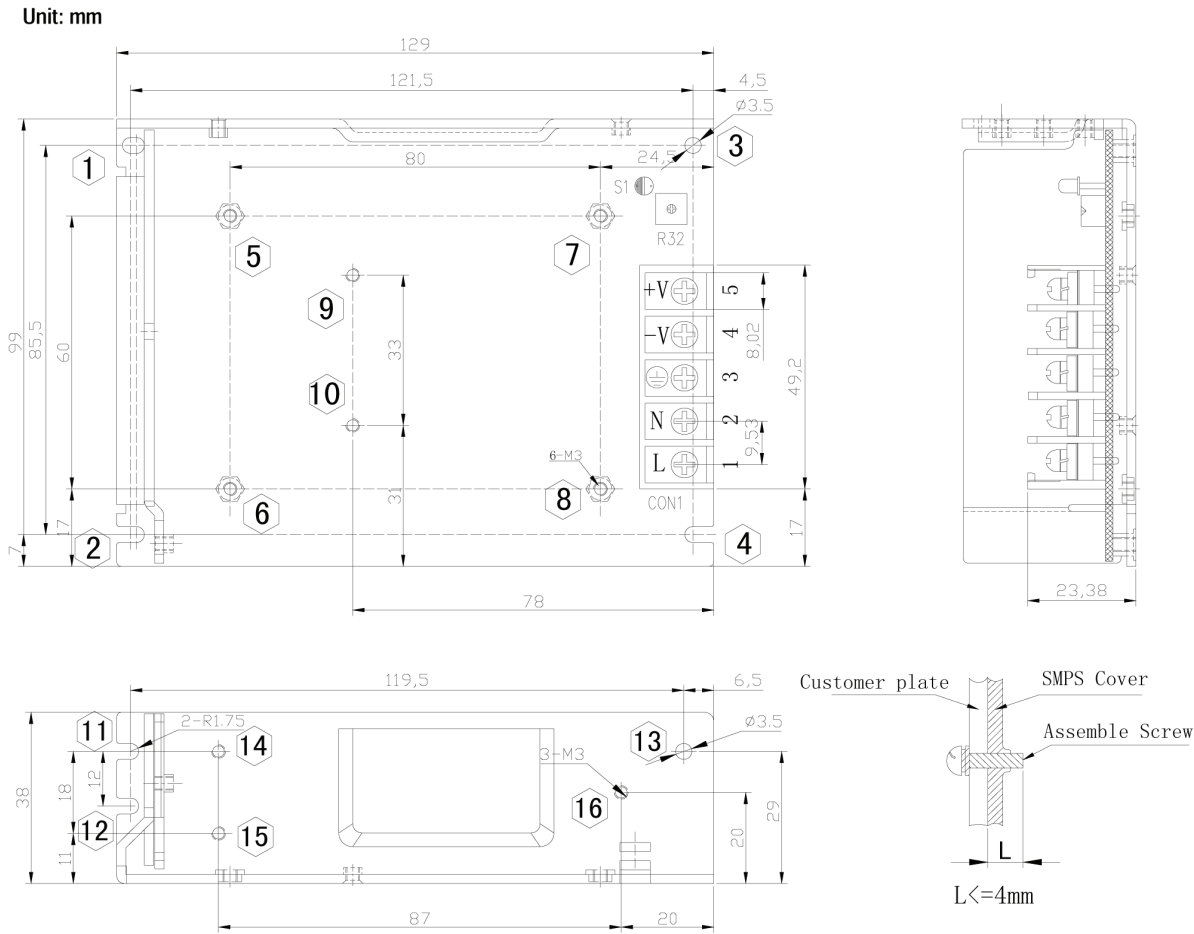

Stontronics Ltd

Chancerygate Business Centre, Cradock Road, Reading, Berkshire, RG2 0AH.

Tel: +44 (0) 118 931 1199 • Fax: +44 (0) 118 931 1145 • Email: info@stontronics.co.uk • Web: www.stontronics.com

Please Note: Image shown is representative of entire range. Individual PSU image &/or drawings or data sheets available on request.

Stontronics Ltd accepts no responsibility for typographical errors in the production of this leaflet. Product specifications are subject to change without notice.