

HDMI 2.0 Zinc Alloy & Braiding

- CPHD2v005 (0.5m to 7.5m)

CABLE[®] POWER

Features






- HDMI 2.0 - 2160P
- 24K Gold Connectors
- 30AWG - OD 6mm



Technical Parameters

ECN MARK	ECN NO.	DESCRIPTION	DATE

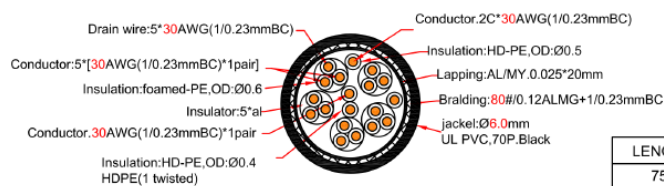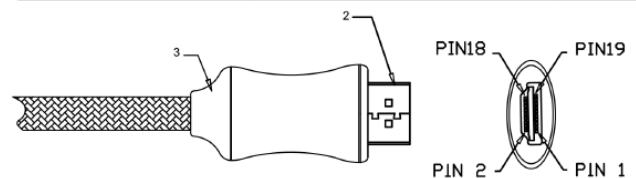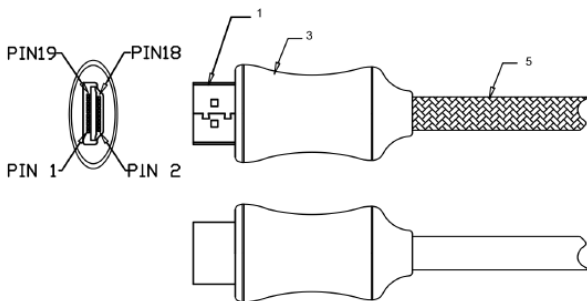

**5P+4C(30AWG)
2.0 Version**

FEATURES

1. Gold-plated plugs
2. compliant ROHS, 2160P

ELECTRICAL SPECIFICATION:

1. Withstanding voltage: 300VDC 0.1SEC
2. Insulation Resistance: 5Mohm 300VDC

LENGTH	AWG
7500mm	30AWG OD:6.0
6000mm	30AWG OD:6.0
5000mm	30AWG OD:6.0
4000mm	30AWG OD:6.0
3000mm	30AWG OD:6.0
2000mm	30AWG OD:6.0
1500mm	30AWG OD:6.0
1000mm	30AWG OD:6.0
500mm	30AWG OD:6.0

Type A PIN	Signal Assignment	Type A PIN
1 Blue	Blue	1 Blue
2 ground	ground	2 ground
3 white	white	3 white
4 Blue	Blue	4 Blue
5 ground	ground	5 ground
6 white	white	6 white
7 Blue	Blue	7 Blue
8 ground	ground	8 ground
9 white	white	9 white
10 Blue	Blue	10 Blue
11 ground	ground	11 ground
12 white	white	12 white
14 Blue	Blue	14 Blue
17 ground	ground	17 ground
19 white	white	19 white
15 Yellow	Yellow	15 Yellow
16 Oregre	Oregre	16 Oregre
13 white	white	13 white
18 red	red	18 red
SHELL	SHELL	SHELL

ITEM.	DWG NO	DESCRIPTIONS&SPECIFICATIONS	QTY.	REMARK	Unit: MM	TOLERANCE	SIGNATURES	DATE	SCALE	TITLE	DWG NO
5		HDMI Cable 5P+4C OD:6.0mm BLACK	1PC			0-10 ±0.20 10-99 ±1.00 100-999 ±10.0 1000-9999 ±100.00 10000-9999 ±1000.00				CPHD2v005	
4		SHELL Gold-Plated	1PC				DRAFT: Jay				
3		HDMI METAL SHELL Zn ALLOY SHINING BLACK	1PC				CHECKED: Neo				
2		HDMI TYPE A PLUG 19PIN(Pins Gold-Plated, SHELL Gold-Plated)	1PC				APPROVAL:				
1		HDMI TYPE A PLUG 19PIN(Pins Gold-Plated, SHELL Gold-Plated)	1PC								
								REV	A1		